



www.AKCP.com

MMS Action Wizard

This tutorial provides you the information needed to setup an MMS action via the notification wizards.

To get to the starting point of this tutorial:

- Log in as administrator
- Click the “Notifications” tab

1. Adding a notification

a) First click on the “notification wizard”

The screenshot shows the AKCP securityProbe web interface. The top navigation bar includes tabs for Summary, Map, Picture Log, Sensors, Notification, Settings, Applications, and Help. The Notification tab is selected and highlighted with a red circle and the text "Click notification tab".

On the left side, there is a "Notification Menu" with the following items: [Begin Notification Wizard](#), [Action](#), [Sensor Action Link](#), [Options](#), [View Notification Log](#), [Notification Analyzer](#), and [Help](#). The "Begin Notification Wizard" link is circled in red, with a red arrow pointing to it and the text "Click here to begin setting up a notification".


The main content area displays a table of actions. The table has two columns: "Action Type" and "Action Name". The actions listed are:

Action Type	Action Name
SNMP Trap	SNMP Trap 1
	SNMP Trap 2
	SNMP Trap 3
	SNMP Trap 4
	SNMP Trap 5
	SNMP Trap 6
Email	Email 1
	Email 2
	Email 3
Alarm Sound	Alarm Sound 1
	Alarm Sound 2
Speech	Speech 1
	Speech 2
	Speech 3
Picture Log	Picture Log 1


Below the table, there are buttons for "Create", "Duplicate", "Edit", "Remove", and "Test Action".

At the bottom of the page, there is a copyright notice: ©1991 - 2007 AKCP All rights reserved.

b) You will now have the notification wizard page displayed, like below.

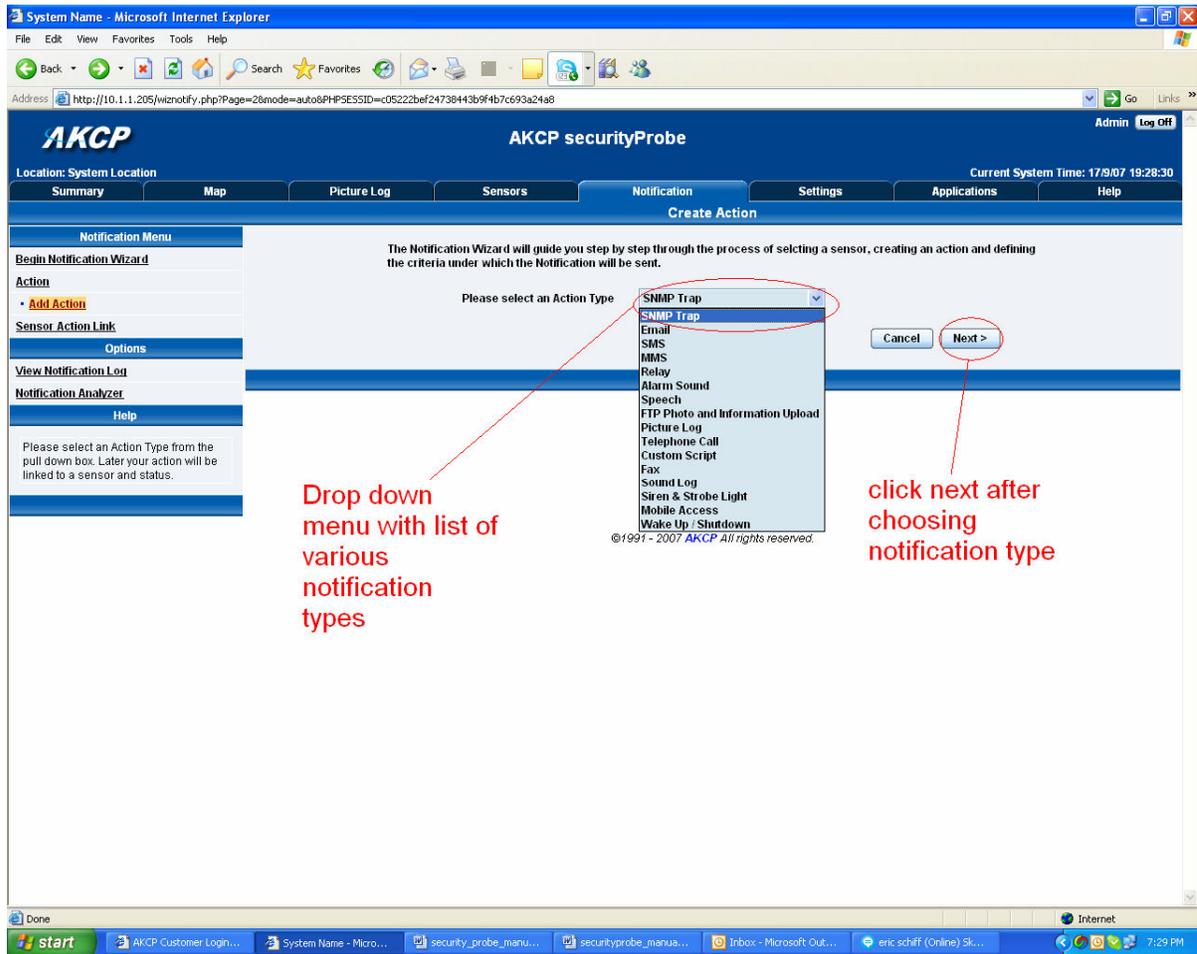

c) Select MMS from the notification type options.

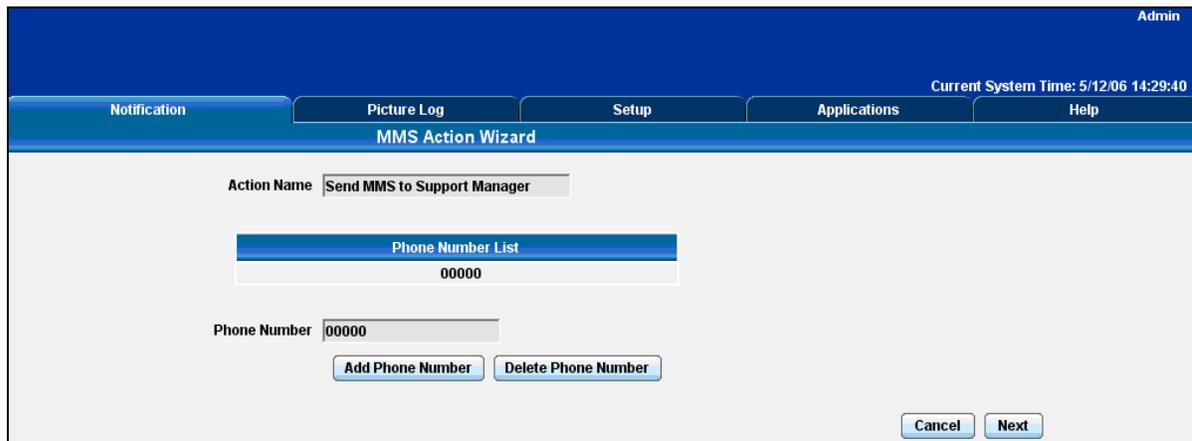

Please choose a name for your MMS Action. Descriptive action names increase the simplicity of the system.

Enter your Destination phone number and Click **Add Phone Number**. You may include multiple phone numbers.

To delete a phone number from the list, select the number and press the **Delete Phone Number** button.

Click **Next** to continue

This is a preview of the message that will be sent to your recipient(s). The message sent will include the details relevant to your sensor.

Click **Customize** to edit the macro.

A macro is the piece of text that will return data from the securityProbe. For example `$(TIME)` will take the time from the securityProbe and append it to the email.

The **Macro Description** button gives you details of the data the macro displays. At any point during editing of the macro you can click the preview button to see the changes you have made to the message.

Click **Attach Picture** to attach a Picture with your message. Select to attach either the Current Picture from the Camera or the most recent Picture Stored on the Picture Log. Select which Cameras you would like to use as the source of your picture.

Click **Next** to continue

The screenshot shows the 'MMS Action Wizard' configuration window. At the top right, it says 'Admin' and 'Current System Time: 5/12/06 14:38:43'. The navigation tabs are 'Notification', 'Picture Log', 'Setup', 'Applications', and 'Help'. The main content area has the title 'MMS Action Wizard' and contains two input fields: 'Access Point Name' with the value 'mms' and 'MMS Server Address' with the value 'http://mms.gsm-operator.com:8002'. At the bottom right, there are three buttons: 'Cancel', 'Back', and 'Next'.

Enter the Access Point Name and MMS Centre URL for your MMS provider. These will be provided by your MMS service provider.

If this information has been entered before it will be already completed.

Click **Next** to continue

The screenshot shows the 'MMS Action Wizard' configuration window. At the top right, it says 'Admin' and 'Current System Time: 5/12/06 14:39:57'. The navigation tabs are 'Notification', 'Picture Log', 'Setup', 'Applications', and 'Help'. The main content area has the title 'MMS Action Wizard' and contains several configuration options: 'WAP Gateway IP Address' (text input), 'WAP Gateway Authentication' (radio buttons for 'Enable' and 'Disable', with 'Disable' selected), 'WAP Gateway Login Name' (text input), 'WAP Gateway Password' (text input), and 'Security Mode' (radio buttons for 'Secure' and 'Non-Secure', with 'Non-Secure' selected). At the bottom right, there are three buttons: 'Cancel', 'Back', and 'Next'.

Enter your WAP gateway IP address, Authentication settings and Security Mode. These will be provided by your MMS service provider.

If this information has been entered before it will be already completed.


Click **Next** to continue

The screenshot shows the 'MMS Action Wizard' configuration window. At the top right, it says 'Admin' and 'Current System Time: 5/12/06 14:41:18'. The navigation tabs are 'Notification', 'Picture Log', 'Setup', 'Applications', and 'Help'. The main content area has the title 'MMS Action Wizard' and contains several configuration options: 'Mobile Phone Port' (dropdown menu showing 'COM1'), 'Mobile Phone Port Speed' (dropdown menu showing 'Auto'), 'Initialization String' (text input), and 'Timeout' (text input showing '60' followed by 'Seconds'). At the bottom right, there are three buttons: 'Cancel', 'Back', and 'Next'.

Select the connection method between your phone and computer.

If you do not know your Port Speed, Timeout and Initialization String leave them as Auto and Blank respectively.

Click **Next** to continue

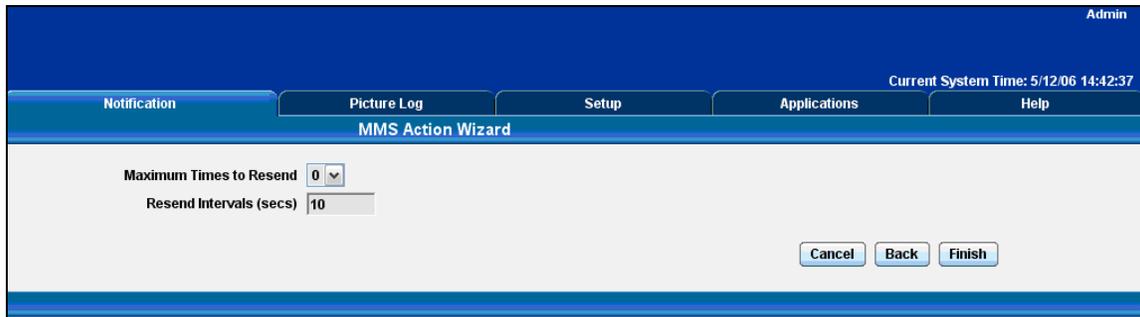

The screenshot shows the 'MMS Action Wizard' Setup screen. The interface has a blue header with 'Admin' in the top right and 'Current System Time: 5/12/06 14:42:37' below it. A navigation bar contains 'Notification', 'Picture Log', 'Setup', 'Applications', and 'Help'. The 'Setup' tab is active, showing the title 'MMS Action Wizard'. Below the title, there are two configuration fields: 'Maximum Times to Resend' with a dropdown menu set to '0', and 'Resend Intervals (secs)' with a text input field containing '10'. At the bottom right, there are three buttons: 'Cancel', 'Back', and 'Finish'.

Define the Maximum number of Times to Resend and Resend Interval for the SMS message to be sent to your recipient(s).

Click **Finish** to Save your Action